



| | | | | | |
|----------------|------------------|----------------------------|-------------------------------|---------------------------------------|-----------------------------------|
| 料号 Part NO. | 品名 Parts Name | 螺纹外径 Thread O. D AG(mm) | 螺纹长度 Thread Length GL (mm) | 主体尺寸 Main Body Dimensions H(mm) | 盖帽尺寸 Cover Dimensions D(mm) |
| 39-HIWA-PG29 | 塑料堵塞件 PG-29 | 37 | 11.5 | 16 | 44 |

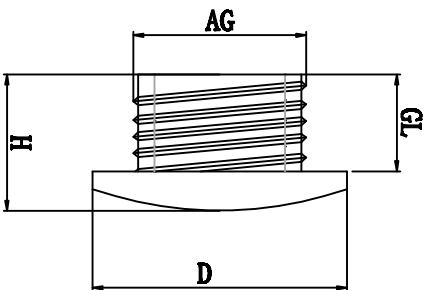

产品材质：采用UL认可的尼龙PA66
 密封胶：丁腈橡胶 (NBR)，耐候橡胶 (EPM)
 工作温度：-20℃至80℃
 防护等级：IP68
 颜色种类：黑色 (RAL9005)、浅灰 (RAL7035)，特殊颜色可定做

| DIMENSION | TOLERANCES | DWG. BY | | | | UNIT |
|------------------|------------|-----------|-----------|----------|-------------------------|------|
| 0.0 0.00 | ±1.0 | liu liang | UNIT | mm | | |
| FIRST ANGLE PROJ | | CHK. BY | liu liang | REV. | A | |
| L.T.R. | | APP. BY | sullivan | DWG. NO. | HIWA-QR-JZ-39-HIWA-PG29 | |
| NEW PART | | zy wang | REVISION | | | |
| SULLIVAN ZY WANG | | | DWG. BY | | | |
| 2009/08 | | | CHK. BY | | | |
| | | | DATE | | | |



未经许可不得修改和复印
 该知识产权属于技术质量部；