


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-250ST	束线带S	GT-250ST	250	4.8	60	22.2		

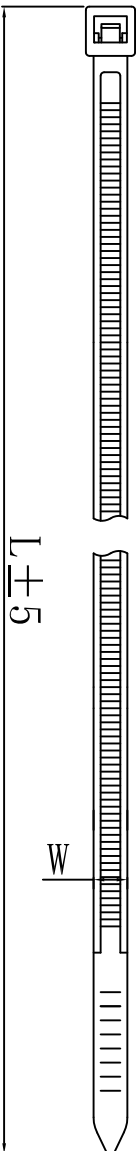

材质: 采用UL认证材料66, 防火等级94V-2, 阻燃,
耐腐蚀, 绝缘性好, 不变色, 承受力强.

温度: 可至85℃.

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES		LTR.	NEW PART	DWG. BY	CHK. BY	DATE	DWG. BY	UNIT
	0.0 0.00	±0.2						A	<i>liu liang</i>
PRIST ANGLE PROJ					<i>oullian</i>	<i>yu wang</i>	<i>2008</i>	CHK. BY	REV.
								APP. BY	DWG. NO.
								<i>wang zhiyan</i>	HIWA/OR-JZ-31-HIWA-250ST

未经授权不得修改和复印
该知识产权属于技术质量部

HIWA 惠华
苏州惠华电子科技有限公司