


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (kg)	包装 packing	相关认证
31-HIWA-GT-290HDL	束线带S	GT-290HDL	290	9.0	80.4	79.4		

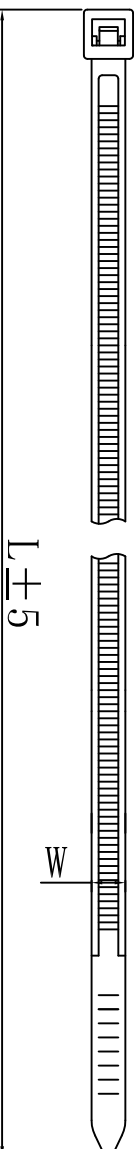

材质: 采用UL认证材料66, 额定电压94V-2, 耐磨、耐腐蚀、绝缘性好、不变色、承受力强。

温度: 可达85℃。

颜色: 各种颜色皆可定制

技术要求:

有光泽, 手感好, 无掉齿
无封洞, 无气泡



DIMENSION	TOLERANCES					DATE	DWG. BY			UNIT	mm
		A	NEW PART	CHK. BY	DATE		APP. BY	CHK. BY	REV.		
0.0	±0.2				2008	liu liang	liu liang				
0.00					2008	qullian	qullian				A
FIRST ANGLE PROJ		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	APP. BY	CHK. BY	DWG. NO.		
		A		qullian	zy wang	2008	wang zhiyan		HIWA/QR-JZ-31-HIWA-290HDL		

未经并受权不得修改和复印
该知识产属于技术质量部

HIWA 惠华 苏州惠华电子科技有限公司