
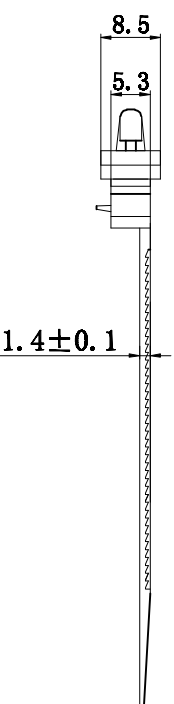


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	Hole Diameter (mm)	Panel Thickness (mm)	相关认证
31-插销-HIWA-0.50*80	插销式束线带	GTP-80ST	88	4.8	15	8.1	Φ4.8	~2.4	

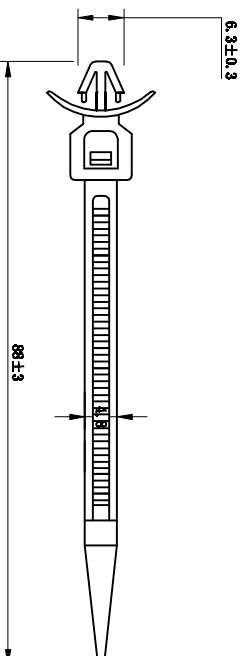

产品说明：适合工业及一般家电产品之电源线捆绑及固定用；先将机板钻孔，然后把扎带插入孔径，再将电线扎紧即可。

材质：尼龙，UL耐燃等级94V-2

颜色：各种颜色皆可定制
公差：L±3，未标为±0.2

技术要求：

有光泽，手感好，无掉齿
无封洞，无气泡，无飞边

DIMENSION	TOLERANCES					DWG. BY	CHK. BY	APP. BY	DWG. NO.
0.0 0.00	±0.5					<i>Lin Liang</i>			UNIT
						<i>William</i>			REV.
						<i>wang shiyuan</i>			mm
									A
PRIST ANGLE PROJ		A	NEW PART	ADDRESS	DATE				
		LTR.	REVISION RECORD	DWG. BY	CHK. BY				

HIWA 惠州惠华电子科技有限公司

HIWA/QR-JZ-31
-插销-HIWA-0.50-80

未经授权不得修改和复印
该知识产权属于技术质量部