


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	Hole Diameter (mm)	Panel Thickness (mm)	相关认证
31-插销-HIWA-GTP-130ST-1	插销式束线带	GTP-130ST (1)	132	4.8	25	22.2	Φ6.4	~3.0	



产品说明：适合工业及一般家电产品之电源线捆绑及固定用；先将机板钻孔，然后把扎带插入孔径，再将电线扎紧即可。

材质：尼龙66，UL耐燃等级94V-2  
颜色：白色

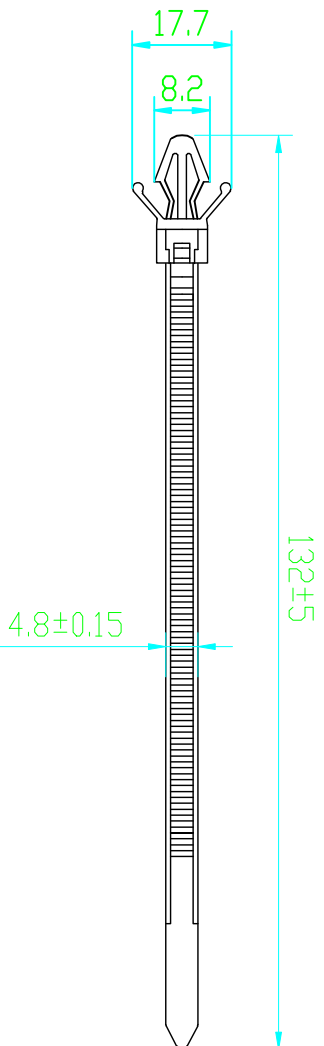

未经授权不得修改和复印  
该知识产权属于技术质量部

DIMENSION		TOLERANCES		LITER.		NEW PART		DWG. BY		CHK. BY		DATE	
0.0	0.00	±0.5		A									
FRIST ANGLE PROJ				LITER.		NEW PART		DWG. BY		CHK. BY		DATE	
DWG. BY	<i>Lin Wang</i>	UNIT	mm	CHK. BY	<i>willian</i>	REV.	A	APP. BY	<i>wang shiyuan</i>	DWG. NO.	HIWA/OR-JZ-31 -插销-HIWA-GTP-130ST-1		

**HIMA** 惠州惠华电子科技有限公司