

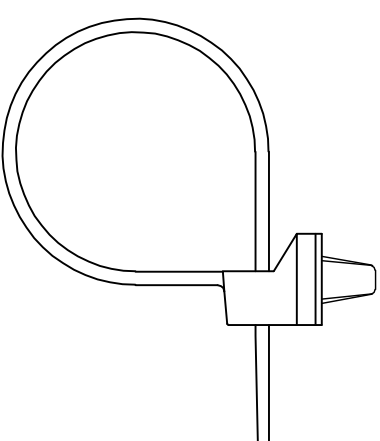


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	Hole Diameter (mm)	Panel Thickness (mm)	相关认证
31-插销-HIWA-170ST-1	插销式束线带	GTP-170ST(1)	175	4.8	38	22.2	Φ6.4	~3.2	

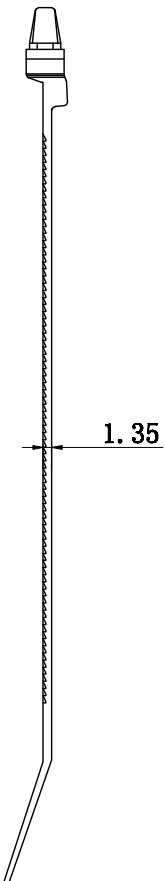

产品说明：适合工业及一般家电产品之电源线捆绑及固定用；先将机板钻孔，然后把扎带插入孔径，再将电线扎紧即可。  
 材质：尼龙66，UL阻燃等级94V-2  
 使用温度：-40℃—85℃  
 颜色：白色  
 公差：L±5

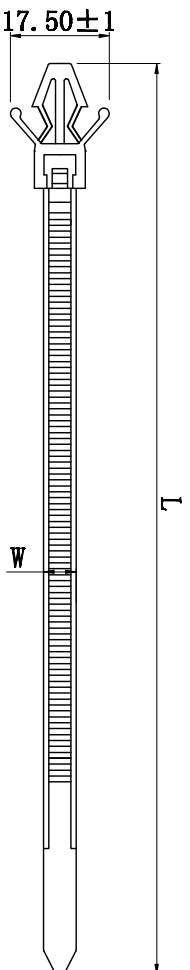

未经授权不得修改和复印  
 该知识产权属于技术质量部

DIMENSION	TOLERANCES	DRAWING INFORMATION				APPROVAL		
		APP. BY	CHK. BY	DATE	APP. BY	CHK. BY	DATE	
0.0 0.00	±0.20	A						
FIRST ANGLE PROJ		NEW PART	REVISION	DWG. BY	CHK. BY	DATE		
LITR.		RECORDED						

HIWA 惠华  
 APP. BY: *wang yiqian*  
 CHK. BY: *ouliuan*  
 DWG. BY: *liu liang*  
 UNIT: mm  
 REV. A  
 DWG. NO. HIWA/OR-JZ-31-1  
 31-插销-HIWA-170ST-1

苏州惠华电子科技有限公司