


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	包装 packing
31-连接-HS-02.5*100AT	连接卷式束线带	GTT-100AT	100	2.5	22	8.1	5000PCS/卷



材质：采用UL认证尼龙66，防火等级94V-2、耐酸、耐腐蚀、绝缘性好、不宜老化、承受力强。
 温度：可达85℃。
 颜色：白色（本色）；

技术要求：
 有光泽，手感好，无掉齿
 无封洞，无气泡

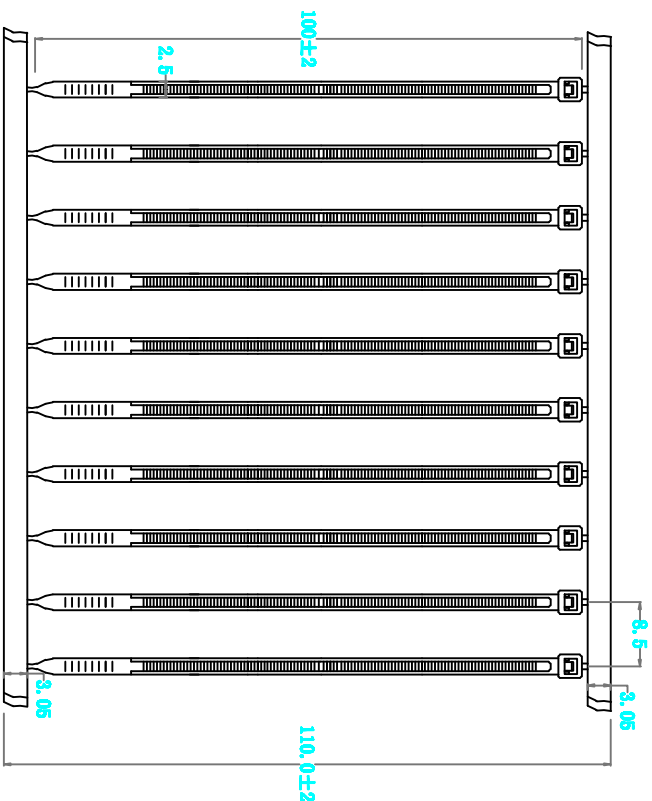

DIMENSION	TOLERANCES	REVISION RECORD				DATE	DWG. BY	CHK. BY	DATE
		NEW PART	REVISION RECORD	DWG. BY	CHK. BY				
0.0 0.00	±0.20	A							
FIRST ANGLE PROJ									
LTM									
DWG. BY		CHK. BY		APP. BY		DWG. NO.		UNIT	
Lin Liang		oullian		wang yehuan		HIMA/QR-JZ-31 -#HS-02.5-100AT		mm	
REV.		APP. BY		DWG. NO.		HIMA/QR-JZ-31 -#HS-02.5-100AT		A	

未经许可不得修改和复印
 该知识产权属于技术质量部