



| | | | | | |
|----------------|------------------|----------|-----|-----|---------------|
| 料号 Part NO. | 品名 Parts Name | 规格 | A | B | Thickness (T) |
| 34-SS1-5.5S | 间隔柱 | SS1-5.5S | 5.5 | 0.5 | 0.8-1.0 |

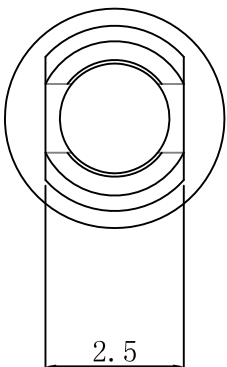

P.C.B $\varnothing 3.0$
THICKNESS T

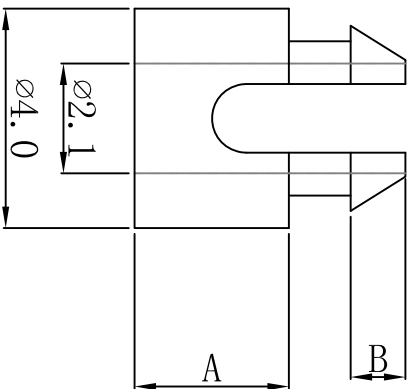

FOR M2 SCREW

材质: 尼龙66 (UL)
阻燃等级: 94V-2
颜色: 本色
单位: mm

| DIMENSION | TOLERANCES | | | | | | | | |
|------------------|--------------------|------|-----------------|-----------------|-----------------|--------------|---------|----------|------------------------|
| 0.0 0.00 | ± 0.5 | | | | | | | | |
| PRIST ANGLE PROJ | | A | NEW PART | <i>oullivan</i> | <i>yu wang</i> | <i>20108</i> | DWG. BY | CHK. BY | DATE |
| | | LTR. | REVISION RECORD | | | | | | |
| DWG. BY | <i>liu liang</i> | UNIT | mm | CHK. BY | <i>oullivan</i> | REV. | A | DWG. NO. | HIWA/QR-JZ-34-SS1-5.5S |
| APP. BY | <i>wang zhiyan</i> | | | | | | | | |



未经并受权不得修改和复印
该知识产权属于技术质量部;