



| | | |
|----------------|------------------|------|
| 料号 Part NO. | 品名 Parts Name | A |
| 34-LEDT-14.5 | 间隔柱 LEDT-14.5 | 14.5 |

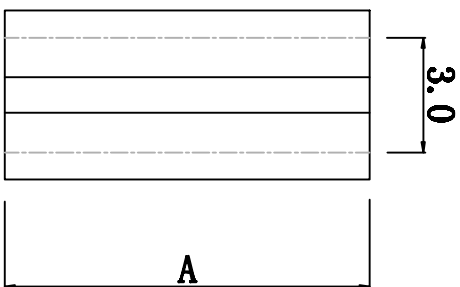

- ◆ MATERIAL: NYLON 66 (UL)
 - ◆ FLAME CLASS: 94V-2
 - ◆ COLOR: NATURAL
- 用途: 做为PC板与机板间之固定。
公差要求: 未标注公差±0.3

| DIMENSION | TOLERANCES | DWG. BY | | UNIT | mm |
|------------------|------------|------------------|---------------------|----------------|-------------------------|
| 0.0 0.00 | ±0.3 | <i>liu liang</i> | <i>william</i> | REV. | A |
| FRIST ANGLE PROJ | | APP. BY | <i>wang yiliang</i> | DWG. NO. | HIMA/QR-JZ-34-LEDT-14.5 |
| | A | NEW PART | <i>william</i> | CHK. BY | <i>william</i> |
| | LTR. | REVISION RECORD | DWG. BY | CHK. BY | DATE |
| | | | <i>william</i> | <i>william</i> | <i>william</i> |



未经许可不得修改和复印
该知识产权属于技术质量部;