

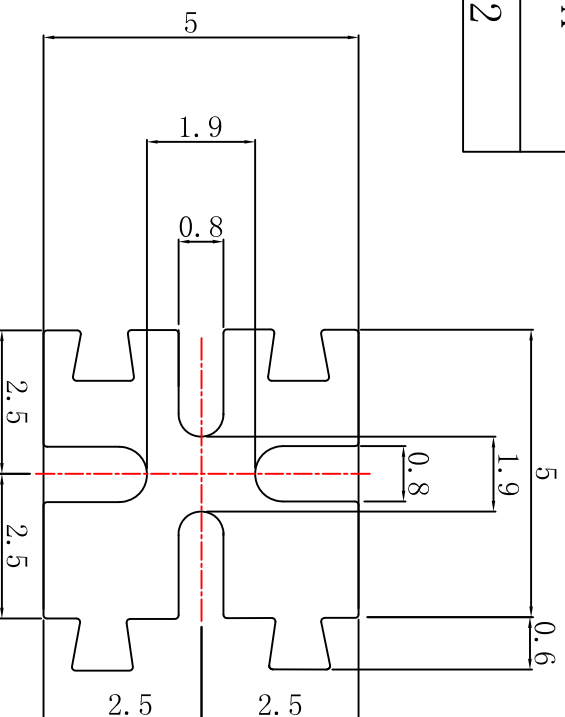


| | | | |
|----------------|------------------|---------|----|
| 料号 Part NO. | 品名 Parts Name | 规格 | A |
| 34-LEDP-12 | 间隔柱 | LEDP-12 | 12 |

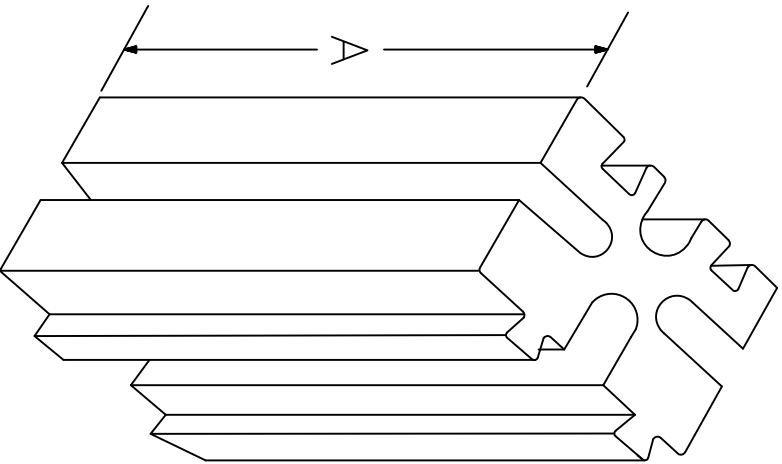

材料: NYLON 66 94V-2
颜色: Black
公差: ± 0.2 mm

用途: 保护LED固定PC板上, 使接脚不会弯曲、折断、短路。可连接多个LED座, 并使LED高度一致

the products need to cooperate
colseely while using
产品使用时需组合使用



未经受权不得修改和复印
该知识产权属于技术质量部;

| DIMENSION | TOLERANCES | | | | | | |
|------------------|--------------------|----------|-----------------------|----------------|----------------|--------------|---|
| 0.0 0.00 | ± 0.5 | | | | | | |
| FRIST ANGLE PROJ | | A | NEW PART | <i>caulian</i> | <i>yu wang</i> | <i>20108</i> | |
| | | LTR. | REVISION RECORD | DWG. BY | CHK. BY | DATE | |
| | | | | | | | |
| DWG. BY | <i>lin liang</i> | UNIT | mm | CHK. BY | <i>caulian</i> | REV. | A |
| APP. BY | <i>wang zhiyan</i> | DWG. NO. | HIMA/QR-JZ-34-LEDP-12 | | | | |