


|                    |                  |                   |                     |                    |
|--------------------|------------------|-------------------|---------------------|--------------------|
| 料号<br>material No. | 品名<br>Parts Name | 型号<br>Part NO.    | 螺栓口直径<br>screw dia. | 美制螺栓号<br>USA screw |
| 40-SVL1.25-3.5     | 叉形预绝缘端子          | SVL1.25-3.5<br>红色 | 3.7                 | #6                 |



导线截面: 0.5-1.5mm<sup>2</sup> (美国线规22-16)  
 最大电流: I<sub>max</sub>=19A  
 材 质: 紫铜 PVC  
 材料厚度: 0.75mm  
 Cable size:0.5~1.5mm(A.W.G.22~16)  
 max current :I<sub>max</sub>=19A  
 material:purple copper PVC  
 thickness:0.75mm

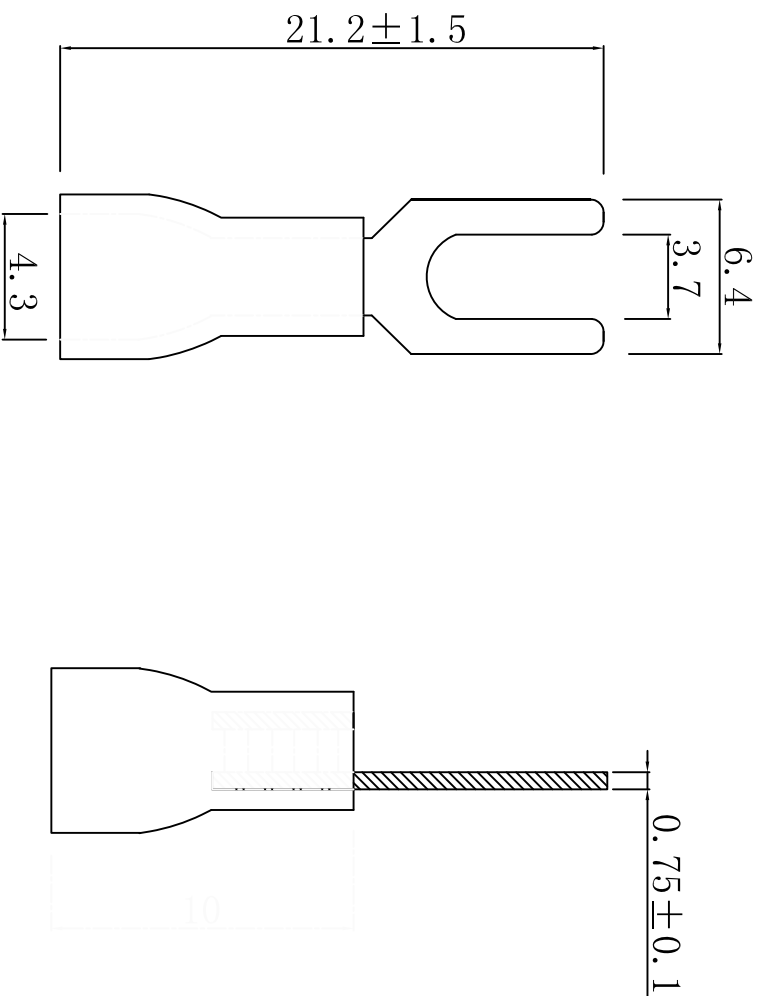

未经许可不得修改和复印  
 该知识产权属于技术质量部

| DIMENSION |      | TOLERANCES   |  | FIRST ANGLE PROJ |  | LTR. |  | NEW PART |  | REVISION RECORD |  | DWG. BY |  | CHK. BY |  | DATE |  |
|-----------|------|--------------|--|------------------|--|------|--|----------|--|-----------------|--|---------|--|---------|--|------|--|
| 0.0       | 0.00 | ±0.5         |  | A                |  |      |  |          |  |                 |  |         |  |         |  |      |  |
| DWG. BY   |      | CHK. BY      |  | APP. BY          |  | UNIT |  | REV.     |  | A               |  | mm      |  |         |  |      |  |
| Liu liang |      | sullivan     |  | wang shiyuan     |  | UNIT |  | REV.     |  | A               |  | mm      |  |         |  |      |  |
| DWG. NO.  |      | HIMA/QR-JZ-4 |  | SVL1.25-3.5      |  |      |  |          |  |                 |  |         |  |         |  |      |  |

HIMA 惠华苏州惠华电子科技有限公司