



料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Length (mm)	Approx. Width (mm)	最大束径 (mm)	最小拉力 (KG)	适用线径 (mm)
31-HIWA-T50S0SMA3.4E	汽车扎带	T50S0SMA3.4E	150	4.6	35.0	22.2	3.4±0.3

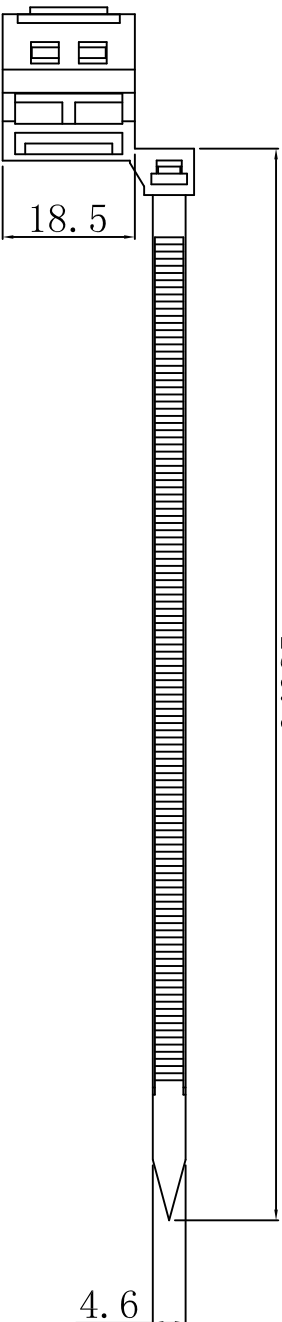

材料: 采用UL认证材料66, 防火等级94V-2, 耐酸, 耐腐蝕,
绝缘性好, 不宜老化, 承受力强.
温度: 可达85℃.
颜色: 黑色
L±5

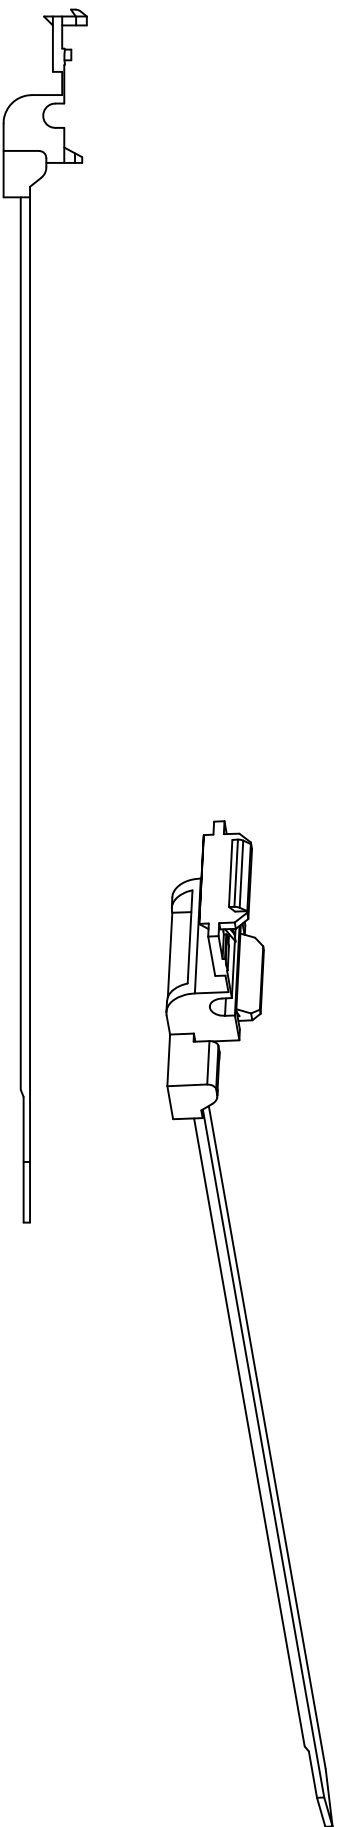

DIMENSION		TOLERANCES		REVISION RECORD		DATE	
0.0	±0.50	A	NEW PART	2009/10	DWG. BY	CHK. BY	DATE
0.00		B	update tolerances	2012/16			

DWG. BY	CHK. BY	APP. BY	UNIT	DWG. NO.
liu liang	sullivan	wang yanyan	mm	HIWA-QR-17-31-HIWA-T50S0SMA3.4E
REV.				
A				

未经授权不得修改和复印
该知识产权属于技术质量部

HIWA 惠州 苏州 惠华电子科技有限公司