


|            |                  |                |                 |      |     |     |     |                                 |        |
|------------|------------------|----------------|-----------------|------|-----|-----|-----|---------------------------------|--------|
| 料号         | 品名<br>Parts Name | 型号<br>Part NO. | Dimensions (mm) |      |     |     |     | Conductor<br>(mm <sup>2</sup> ) |        |
|            |                  |                | F               | L    | W   | B   | Dφ  |                                 | Cφ     |
| 40-TE 7510 | 双线管型预绝缘端头        | TE 7510        | 10              | 16.7 | 5.5 | 6.7 | 2.1 | 1.8                             | 2X0.75 |



最大耐压: 105°C 300V  
 材质: 紫铜 尼龙

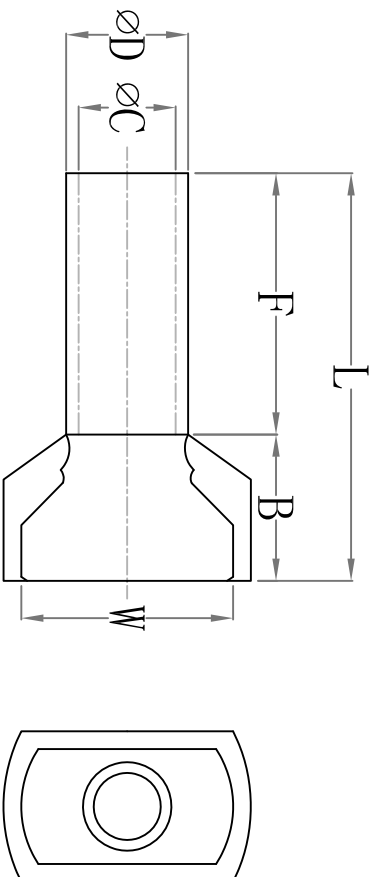

未经许可不得修改和复印  
 该知识产权属于技术质量部

|                  |            |      |                 |               |                |                |              |                    |                  |                       |    |
|------------------|------------|------|-----------------|---------------|----------------|----------------|--------------|--------------------|------------------|-----------------------|----|
| DIMENSION        | TOLERANCES |      |                 |               |                |                |              |                    | DWG. BY          | UNIT                  | mm |
| 0.0<br>0.00      | ±0.5       |      |                 |               |                |                |              |                    | <i>lia liang</i> | REV.                  | A  |
| FIRST ANGLE PROJ |            | A    | NEW PART        | <i>allian</i> | <i>ya wang</i> | <i>2010/08</i> | APP. BY      | <i>wang ziyuan</i> | DWG. NO.         | HIMA/QR-JZ-40-TE 7510 |    |
|                  |            | LTR. | REVISION RECORD | DWG. BY       | CHK. BY        | DATE           | 苏州惠华电子科技有限公司 |                    |                  |                       |    |