


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strength (kg)	适用机板孔径	适用机板厚度
31-E25-055	螺旋式头束线带	2.4*58MM B	64	2.5	12	8.1	4.9-5.1	1-5



材料: 采用UL认证尼龙66, 耐电压94V-2, 阻燃、耐摩擦、绝缘性好, 不宜老化, 承受力强。
 温度: 85℃。
 颜色: 黑色;
 L±5

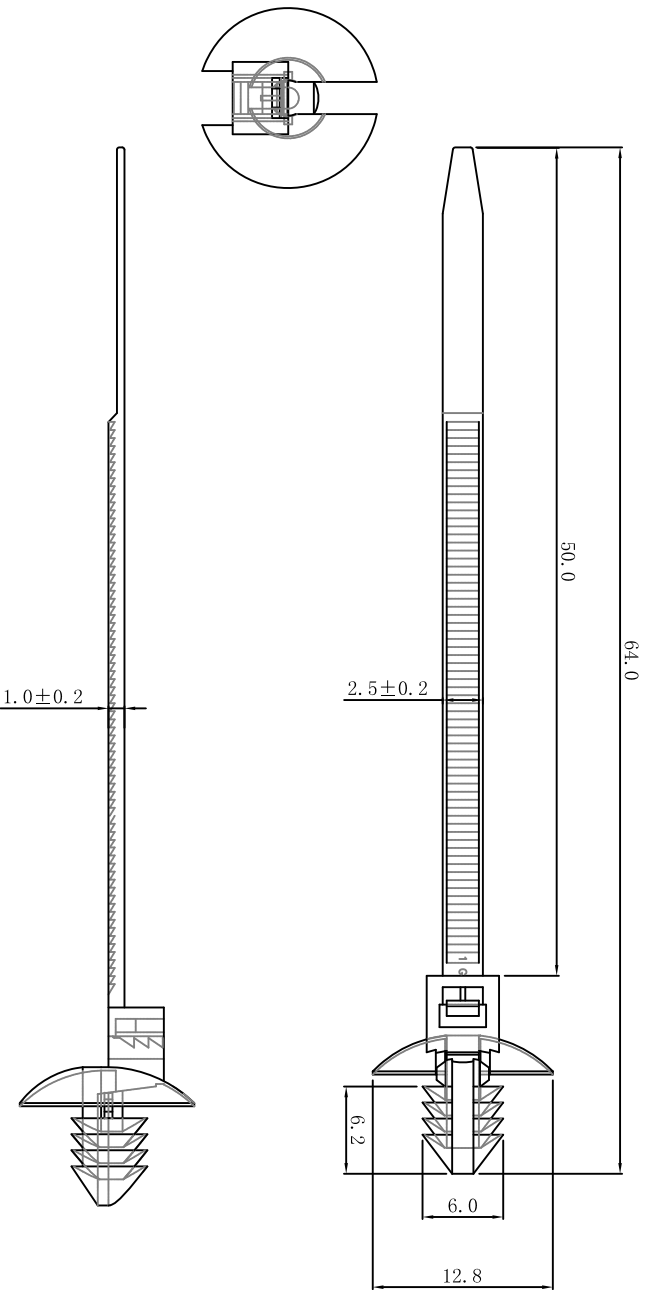

DIMENSION	TOLERANCES									
0.0 0.00	±0.5									
FRIST ANGLE PROJ										
A	NEW PART									
LTR.	REVISION RECORD									
	DWG. BY	william								
	CHK. BY	zy wang								
	DATE	202108								
DWG. BY	CHK. BY	UNIT	DWG. NO.							
lin liang	william	mm	HWA/QR-JZ-31-E25-055							
APP. BY										
wang zhiqian										
REV.										
A										

未经并受权不得修改和复印
该知识产权属于技术质量部

HWA 惠华 苏州惠华电子科技有限公司