





料号 Part NO.	品名 Parts Name	型号 Part NO.	通用电缆/wire Range		螺钉 螺丝	尺寸 Dimensions (mm/in.)						包装 Packing	相关认证
			Cross-Sec.	AWG, Cu		A	B	C	D	E	F		
41-08FDS-Y	端子台	PA8F DS	1.5mm <sup>2</sup>	#22-#12 Sol #22-#12 Str	M2.6 x 5	96.20	16.40	12.70	8.20	2.90	2.8 ± 0.1	50pcs/bag 500pcs/Ctn	VDE/FI/CCC/UL/CSA

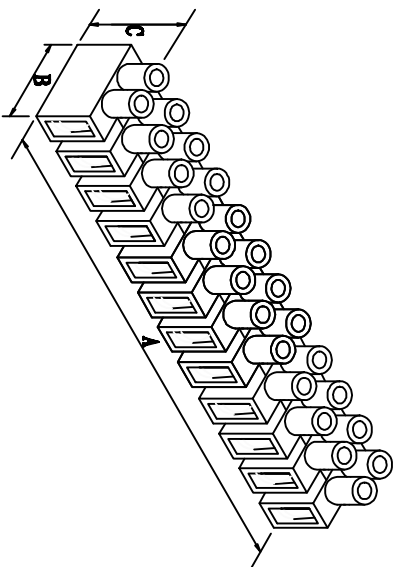

**介绍:**

底座: 平底.

材质: 尼龙66工程塑胶,

防火等级 UL 94V-2 或 94V-0 阻燃等级.

温度: 105°C (UL), -30°C to 110°C (IEC).

底座: 铜合金, 镀锌.

螺丝: 铁线, 镀锌.

剥线长度: PA8 约 5.0mm / 0.20in.

接线排数: 12 排.

公差: 未标注为 ± 1mm

技术参数 (安规认证与电气规格):

VDE/FI/CCC/: 450V, 17.5A, 1.5mm<sup>2</sup>

UL/CSA: 300V, 20A, #22-#12



未经授权不得修改和复印  
该知识产权属于技术质量部

DIMENSION	TOLERANCES	尺寸 Dimensions (mm/in.)				Packaging	相关认证
		A	B	C	D		
0.0 0.00	±0.10						
FRIST ANGLE PROJ		A		NEW PART		DWG. BY	
		LTP		REVISION RECORD		CHK. BY	
		address		signature		DATE	
DWG. BY		CHK. BY		APP. BY		DWG. NO.	
Lin liang		willian		wang shiyuan		HIWA/GR-UZ-41-08FDS-Y	
UNIT		REV.		DWG. NO.		A	
mm							

**HWA** 惠华电子科技有限公  
司