


料号 Part NO.	品名 Parts Name	型号 Part NO.	Approx. Lenght (mm)	Approx. Width (mm)	Max. Bundle Dia. (mm)	Min. Loop Tensile Strenght (N)	适用螺丝
31-E25-087	固定式束线带	T50S0SSBS5E	160	4.6	35	200.0	5mm

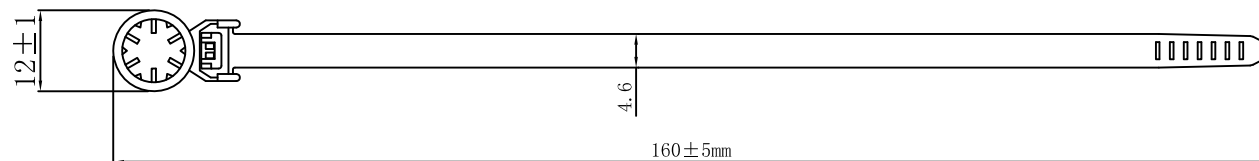

材质: 采用UL认证尼龙66, 防火等级94V-2, 耐晒、耐腐蚀、绝缘性好、不宜老化、承受力强。

温度: 可达85℃。

颜色: 黑色;



DIMENSION	TOLERANCES						DWG. BY	liu liang	UNIT	mm
0.0 0.00	±0.2						CHK. BY	sullivan	REV.	A
FRIST ANGLE PROJ		A	NEW PART	sullivan	zy.wang	2010/08	APP. BY	wang zhiyan	DWG. NO.	HIWA/QR-JZ-31-E25-087
		LTR.	REVISION RECORD	DWG. BY	CHK. BY	DATE	苏州惠华电子科技有限公司			

未经许可不得修改和复印  
该知识产权属于技术质量部